



# ME-ARTR Advanced Router Provides Complete System-level Connectivity and Programming

Quickly and easily connect multiple inverter/chargers, charge controllers, and accessories without individual programming using the Magnum Energy ME-ARTR Router. This advanced router is designed to provide system-level connectivity and programming for large Magnum Energy installations. One ME-ARTR can accommodate up to four MS-PAE or MS-PE inverter/chargers in parallel and program up to seven PT-100 solar charge controllers at once. The advanced router can also handle two ME-AGS modules, multiple ME-BMK monitors, and one ME-ARC or ME-RC remote.

## THE ME-ARTR IS DESIGNED TO CONNECT LARGE MAGNUM ENERGY INSTALLATIONS

#### **Advanced Router Features**

- Harvest up to 42kW of solar with the ability to program and connect to the balance of system equipment with one ME-ARTR.
- Install firmware upgrades in the field with a microSD card.
- "Bulk Always" setting always starts in BULK charging mode, ideal for charging li-on chemistries with custom settings.
- Optimized scheduling parameters with pop-up reminders for better feedback to ensure the system is perfoming at peak levels.
- No programming necessary for MS-PAE parallel operation

# IDEAL FOR USE WITH



Magnum Energy MPDH Panel and four MS-PAE Inverter/Chargers



Up to seven (7) PT-100 Charge Controllers for 42kW output at 48V


#### **Model Number**

ME-MGT-MW

#### **Works With**

- MMP Panel System
- MP Panel System
- MS-PAE Inverter/Charger
- MS-PE Inverter/Charger
- PT-100 Charge ControllerME-AGS Auto Gen Start
- ME-BMK Battery Monitor
- ME-ARC Remote
- ME-RC Remote

## ME-ARTR ROUTER AT-A-GLANCE

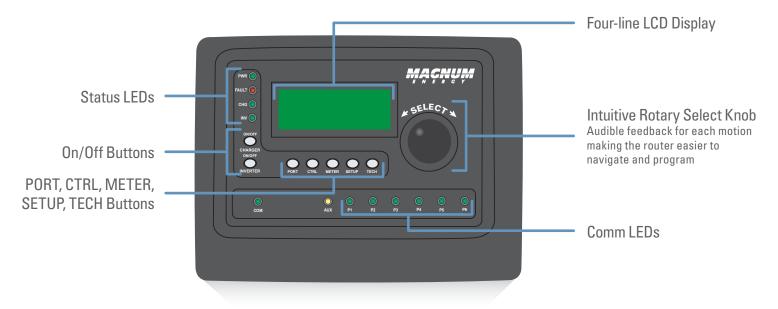

The ME-ARTR is designed to allow cables to be concealed behind the front cover or they may be threaded through an opening in the wall.

## ME-ARTR SPECIFICATIONS

| INPUTS                             |  |
|------------------------------------|--|
| Parallel stack ports               | Four Cat 5 ports   |
| Aux relay                          | One 2-wire terminal  |
| Comm/accessory ports               | Six  |
| MicroSD card slot                  | One  |
| POWER REQUIREMENTS                 |  |
| Power consumption (on)             | 2.8 watts  |
| BATTERY SETTINGS                   |  |
| Available battery settings         | Bulk, Absorb, Float, EQ, Bulk Always                                   |
| Available battery types            | AGM1, AGM2, Flooded, GEL, CC/CV, Custom                                |
| Communication default battery type | Flooded  |
| GENERAL FEATURES                   |  |
| Warranty                           | One year. Five years if installed on a Magnum Energy MMP or MP System. |
| ENVIRONMENTAL SPECIFICATIONS       |  |
| Ambient temperature range          | -4 °F to 149 °F (-20 °C to 65 °C)                                      |
| PHYSICAL SPECIFICATIONS            |  |
| Dimension (WxHxD)                  | 8.94" x 6.63" x 1.94" (22.7 cm x 16.8 cm x 4 cm)                       |



#### OFFICES

2211 West Casino Road Everett, Washington 98204 USA

425-353-8833

4467 White Bear Pkwy St. Paul, MN 55110 USA

800-553-6418

Testing for specifications at  $25^{\circ}$  C. Specifications subject to change without notice.

www.SensataPower.com January 2018 Rev A Part#64-0676